


### Cooling Water Pumps



- Kohler® Rental provides one-source responsibility for the power generating system and accessories.
- 950, 1900, and 2800 Lpm (250/500/750 gpm) pump sizes available.
- Construction/Design
  - Pump mounted on galvanized base frame.
  - Totally Enclosed Fan Cooled (TEFC) motor.
  - Combination starter motor and safety disconnect.
  - Flexible coupling with safety guard.
  - Mechanical shaft seal.
- Water Connections
  - Cam and groove type inlet/discharge connections.
  - Pump discharge balancing valve.
- Controls
  - Automatic or manual operation.
  - Chiller control signal cord with mating plug (500/750 gpm).
- Electrical
  - Main power circuit breaker.
  - Phase rotation protection.
  - Size 15 power cable with cam-lock connections.
- Storage and Setup
  - Cable storage hook.

Specifications	250 GPM	500 GPM	750 GPM
<b>Pumping</b>			
Capacity, Lpm (gpm)	950 (250)	1900 (500)	2800 (750)
Pump head, ft. WC	100		
Inlet hose, qty./size	1 @ 4 in.		1 @ 6 in.
Discharge hose, qty./size	1 @ 4 in.		1 @ 6 in.
Outlet height, mm (in.)	899 (35.38)		1505 (59.25)
Pump speed, rpm	1800		
Pump motor size, hp	15	20	30
<b>Electrical</b>			
Volts/Hz/phase	480/60/3		
Running load amps.	18	25	35
MCA (amps.)	24	34	48
Unit circuit breaker, amps.	30	40	50
<b>Unit Weights and Dimensions</b>			
Dimensions, L x W x H, mm (in.)	1549 x 737 x 1346 (61 x 29 x 53)		1676 x 737 x 1651 (66 x 29 x 65)
Weight, kg (lb.)	363 (800)		544 (1200)

## 250 GPM Pump Shown (other models are similar)

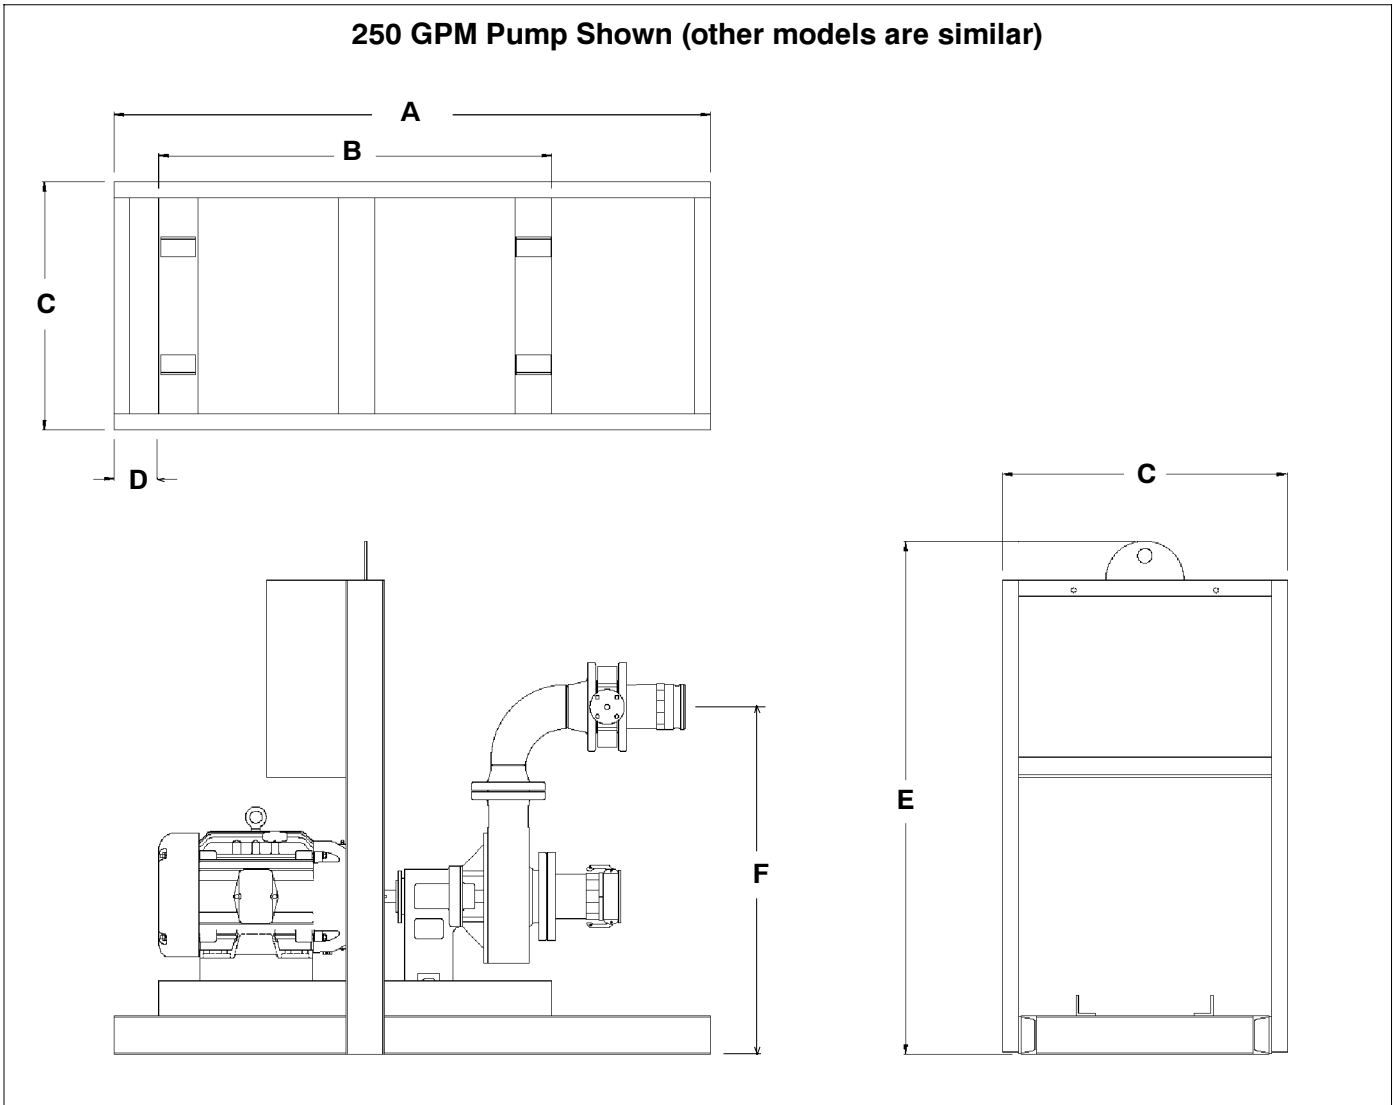

Model	Dimensions, mm (in.)					
	A (Length)	B	C (Width)	D	E (Height)	F
250 GPM	1549 (61)	1016 (40)	737 (29)	127 (5)	1346 (53)	899 (35.4)
500 GPM					1651 (65)	1505 (59.3)
750 GPM	1676 (66)	—				

**DISTRIBUTED BY:**

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler<sup>®</sup> Rental regional office for availability.