




Applicable to the following:
40-150REZG

Weather Enclosure Standard Features


- Internal-mounted critical silencer and flexible exhaust connector.
- Lift base-mounted, steel construction with hinged doors.
- Fade-, scratch-, and corrosion-resistant Kohler® cream beige powder-baked finish.
- Lockable, flush-mounted door latches.
- Vertical air inlet and outlet hoods with 90 degree angles to redirect air and reduce noise.
- High wind bracing, 241 kph (150 mph).

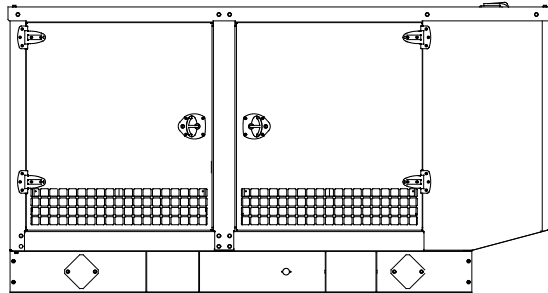

40-60 kW Enclosure

Sound Enclosure Standard Features

- Includes all of the weather enclosure features with the addition of acoustic insulation material.
- Lift base-mounted, steel or aluminum construction with hinged doors. Aluminum enclosures are recommended for high humidity and/or high salt/ coastal regions.
- Acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture absorption.
- Sound attenuated enclosure that uses up to 25 mm (1 in.) of acoustic insulation, acoustic-lined air inlet hoods, and acoustic-lined air discharge hood.

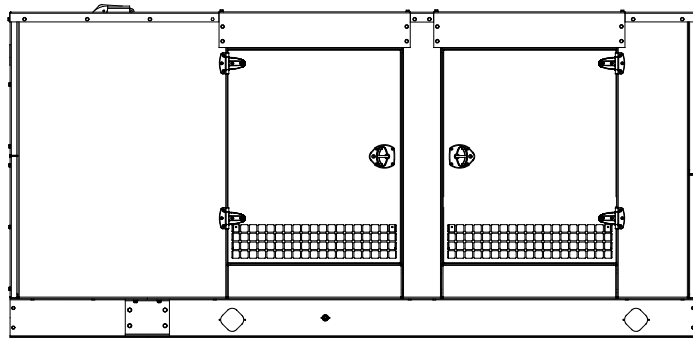

80-150 kW Enclosure

Weather and Sound Enclosure Specifications


Model	Max. Dimensions, mm (in.)			Weight, kg (lb.) †			Sound Enclosure, Sound Pressure at 7 m (23 ft.), dB(A)
	Length	Width	Height	Steel Weather Enclosure	Steel Sound Enclosure	Aluminum Sound Enclosure	
40REZG	2565(101.0)	1078 (42.4)	1364 (53.7)	795 (1753)	800 (1764)	708 (1561)	69
45REZG				899 (1982)	904 (1993)	812 (1790)	69
50REZG				994 (2191)	999 (2202)	907 (2000)	68
60REZG				1118 (2465)	1123 (2476)	1031 (2273)	69
80REZG	3500(137.8)	1156 (45.5)	1697 (66.8)	1513 (3336)	1523 (3358)	1337 (2948)	70
100REZG				1634 (3602)	1645 (3627)	1444 (3183)	71
125REZG				1662 (3664)	1673 (3688)	1469 (3239)	71
150REZG				1843 (4063)	1855 (4090)	1628 (3589)	74

Note: Refer to the respective ADV drawings for details.

† Weight includes the generator set (wet), enclosure, and silencer.

The generator set weight represents using the largest alternator option.

Weather and Sound Enclosure

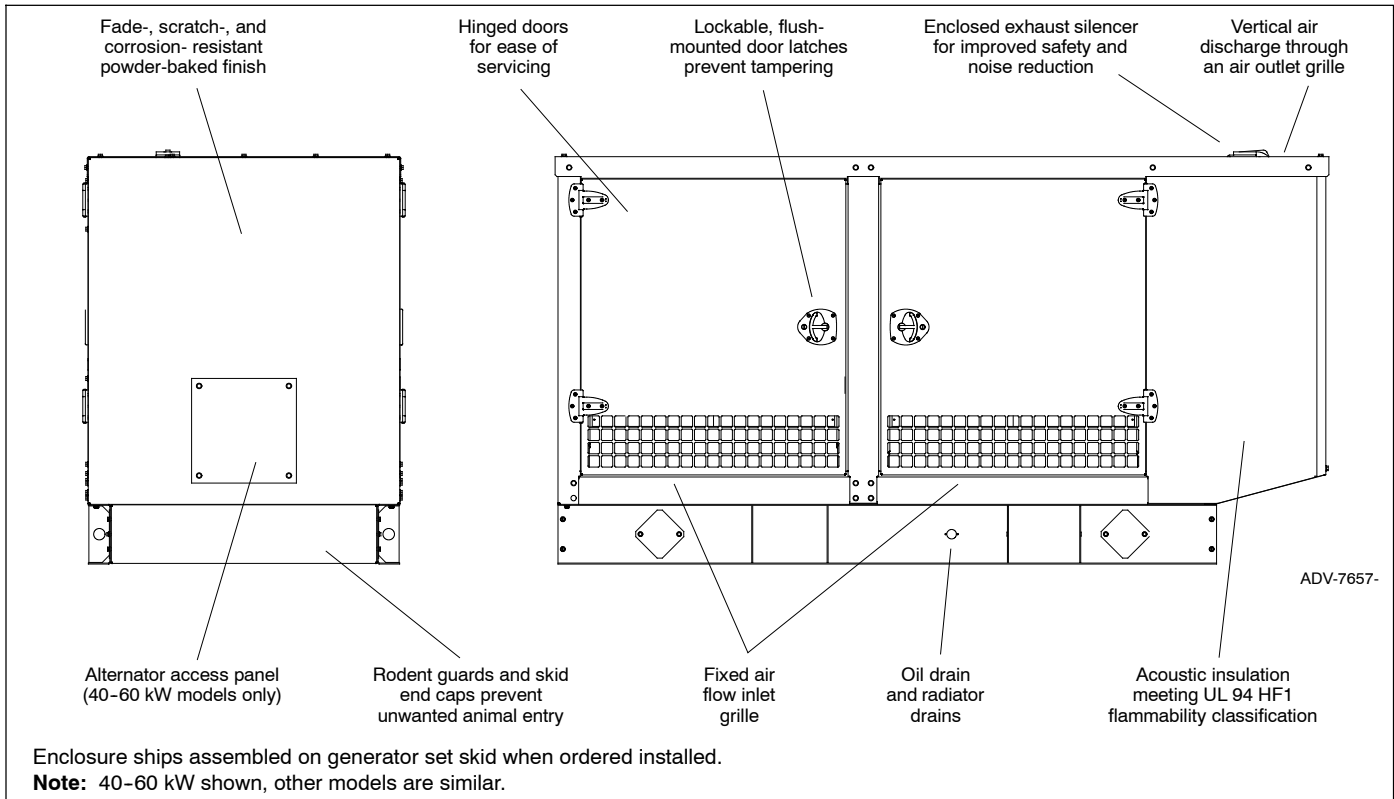

Enclosure Features

- Available in steel (14 gauge) formed panel, solid construction. Preassembled package offering corrosion resistant, dent resilient structure mounting directly to lift base or fuel tank.
- Powder-baked paint. Superior finish, durability, and appearance.
- Internal critical exhaust silencer offering maximum component life and operator safety.
- Interchangeable modular panel construction. Allows complete serviceability or replacement without compromising enclosure design.
- Cooling/combustion air intake with a horizontal air inlet. Sized for maximum cooling airflow.
- Service access. Multi-personnel doors for easy access to generator set control and servicing of the oil fill and battery.

- Cooling air discharge. Weather protective design featuring a vertical air discharge outlet grille. Redirects cooling air up and above enclosures to reduce noise ambient.

Additional Sound Enclosure Features

- Available in steel (14 gauge) or aluminum 3.2 mm (0.125 in.) formed panel, solid construction.
- Attenuated design. Acoustic insulation UL 94 HF1 listed for flame resistance offering up to 25 mm (1 in.) mechanically restrained acoustic insulation.
- Cooling air discharge. The sound enclosures include acoustic insulation with urethane film.

DISTRIBUTED BY:

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator set distributor for availability.

© 2009 by Kohler Co. All rights reserved.